

## LED Track Light



### Features:

- 7W, 9W, 15W, 20W, 30W
- Standard, Beam Adjustable & Slim Versions
- For track systems, surface-mount or recessed installation
- Changeable beam angle by simply push-pull feature, adjustable from 10° to 60°
- Made of high die-casting aluminum for excellent heat dissipation, PMMA lens
- Using CREE LED modules
- Low-glare effect
- Uniform aesthetic appearance & texture
- High CRI95+
- Optical accessories available, elliptical lens & honeycomb
- DALI control optional
- 0° to 90° projection angle adjustable
- 0° to 355° horizontal rotation
- Titanium, white or black color
- 100-240V
- Operating temperature: -20°C to 40°C

### Applications:

- Stores
- Residents
- Hotels
- Offices
- Banks
- Museums
- Galleries
- Exhibitions
- Supermarkets



### General Characteristics:

#### 1, 2, 3 Phase-Wire Installation



PRODUCT CODE	POWER (W)	VOLTAGE	LUMEN OUTPUT	CCT (K)	BEAM ANGLE	PRODUCT DIMENSION
TL-9-W	9W	110-240V/50-60Hz	650-700lm	2700K-4000K	15°, 24°, 36°	D50x120mm
TL-15-W	15W	110-240V/50-60Hz	1000-1100lm	2700K-4000K	15°, 24°, 36°	D60x132mm
TL-20-W	20W	110-240V/50-60Hz	1500-1650lm	2700K-4000K	15°, 24°, 36°	D71x150mm
TL-30-W	30W	110-240V/50-60Hz	1750-1900lm	2700K-4000K	24°, 36°	D83x165mm

#### Surface-Mount Installation



PRODUCT CODE	POWER (W)	VOLTAGE	LUMEN OUTPUT	CCT (K)	BEAM ANGLE	PRODUCT DIMENSION
TL-9-SM	9W	110-240V/50-60Hz	650-700lm	2700K-4000K	15°, 24°, 36°	D50x120mm
TL-15-SM	15W	110-240V/50-60Hz	1000-1100lm	2700K-4000K	15°, 24°, 36°	D60x132mm

#### Recessed Installation



PRODUCT CODE	POWER (W)	VOLTAGE	LUMEN OUTPUT	CCT (K)	BEAM ANGLE	PRODUCT DIMENSION
TL-9-R	9W	110-240V/50-60Hz	650-700lm	2700K-4000K	15°, 24°, 36°	D50x120mm
TL-15-R	15W	110-240V/50-60Hz	1000-1100lm	2700K-4000K	15°, 24°, 36°	D60x132mm
TL-20-R	20W	110-240V/50-60Hz	1500-1650lm	2700K-4000K	15°, 24°, 36°	D71x150mm
TL-30-R	30W	110-240V/50-60Hz	1750-1900lm	2700K-4000K	24°, 36°	D83x165mm

Adjustable Beam Angle for 1, 2, 3 Phase-Wire Installation



PRODUCT CODE	POWER (W)	VOLTAGE	LUMEN OUTPUT	CCT (K)	BEAM ANGLE	PRODUCT DIMENSION
TL-9-Z	9W	110-240V/50-60Hz	550-600lm	2700K-4000K	10° - 60°	D60x100mm
TL-20-Z	20W	110-240V/50-60Hz	950-1050lm	2700K-4000K	10° - 60°	D71x129mm
TL-30-Z	30W	110-240V/50-60Hz	1450-1600lm	2700K-4000K	15° - 50°	D83x157mm

Adjustable Beam Angle for Surface-Mount Installation



PRODUCT CODE	POWER (W)	VOLTAGE	LUMEN OUTPUT	CCT (K)	BEAM ANGLE	PRODUCT DIMENSION
TL-9-Z	9W	110-240V/50-60Hz	550-600lm	2700K-4000K	10° - 60°	D60x100mm

Slim for 1,2,3 Wire-Phase Installation



PRODUCT CODE	POWER (W)	VOLTAGE	LUMEN OUTPUT	CCT (K)	BEAM ANGLE	PRODUCT DIMENSION
TL-7-S	7W	110-240V/50-60Hz	290-300lm	2700K-4000K	15°, 24°, 36°	D40x200mm
TL-9-S	9W	110-240V/50-60Hz	650-700lm	2700K-4000K	15°, 24°, 36°	D50x160mm
TL-15-S	15W	110-240V/50-60Hz	1000-1100lm	2700K-4000K	15°, 24°, 36°	D60x170mm
TL-20-S	20W	110-240V/50-60Hz	1500-1600lm	2700K-4000K	15°, 24°, 36°	D72x190mm
TL-30-S	30W	110-240V/50-60Hz	2300-2400lm	2700K-4000K	15°, 24°, 36°	D82x205mm

Slim for Surface-Mount Installation



PRODUCT CODE	POWER (W)	VOLTAGE	LUMEN OUTPUT	CCT (K)	BEAM ANGLE	PRODUCT DIMENSION
TL-7-S-SM	7W	110-240V/50-60Hz	290-300lm	2700K-4000K	15°, 24°, 36°	D40x200mm

Cautions:

- Please read the contents on the box and label carefully before installation.
- Check if the specification e.g. voltage, current etc meet the requirements.
- Power must be cut off before installation, replacement and cleaning.
- Don't touch the luminaire while it is on or immediately after turning it off. Please wait 15 min. to cool down.

Remarks:

- Power consumption tolerance: +/- 10%.
- Luminous flux & cd tolerance: +/-10%.

\*Photos, descriptions and details of the product are subject to change without previous notice.

## LED Track Light

### Built-in & Side Box Driver



#### Features:

- 7W to 50W
- For track systems, surface-mount or recessed installation
- Built-in or side box driver
- No visible screws
- Made of high die-casting aluminum for excellent heat dissipation
- Philips & Citizen COB
- 90-100lm/W
- Non-dimmable, Triac or DALI
- Uniform aesthetic appearance & texture
- CRI80+ or CRI90+
- Track rail system & accessories available
- Reflector in gold, white or black color
- Black or white housing color
- 15°, 24°, 36°, 45°, 60°

#### Applications:

- Stores
- Residents
- Hotels
- Offices
- Banks
- Museums
- Galleries
- Exhibitions
- Supermarkets

## General Characteristics:

### Built-in Driver



PRODUCT CODE	POWER (W)	VOLTAGE	LUMEN OUTPUT	CCT (K)	LED Module	PRODUCT DIMENSION
TL-7W-BI	7W	220-240V	650-700lm	2700K-4000K	Philips COB	D55x153mm
TL-10W-BI	10W	220-240V	900-1000lm	2700K-4000K	Philips COB	D55x153mm
TL-15W-BI	15W	220-240V	1350-1500lm	2700K-4000K	Philips COB	D74x170mm
TL-20W-BI	20W	220-240V	1800-2000lm	2700K-4000K	Philips COB	D74x170mm
TL-25W-BI	25W	220-240V	2250-2500lm	2700K-4000K	Philips COB	D90x206mm
TL-30W-BI	30W	220-240V	2700-3000lm	2700K-4000K	Philips COB	D90x206mm
TL-35W-BI	35W	220-240V	3150-3500lm	2700K-4000K	Philips COB	D100x180mm
TL-40W-BI	40W	220-240V	3600-4000lm	2700K-4000K	Philips COB	D100x180mm

### Side Box Driver



PRODUCT CODE	POWER (W)	VOLTAGE	LUMEN OUTPUT	CCT (K)	LED Module	PRODUCT DIMENSION
TL-20W-SB	20W	100-240V	1800-2000lm	2700K-4000K	Citizen COB	D90x120mm
TL-30W-SB	30W	100-240V	2700-3000lm	2700K-4000K	Citizen COB	D90x120mm
TL-40W-SB	40W	100-240V	3600-4000lm	2700K-4000K	Citizen COB	D100x135mm
TL-50W-SB	50W	100-240V	4500-5000lm	2700K-4000K	Citizen COB	D113x150mm

#### Cautions:

- Please read the contents on the box and label carefully before installation.
- Check if the specification e.g. voltage, current etc meet the requirements.
- Power must be cut off before installation, replacement and cleaning.
- Don't touch the luminaire while it is on or immediately after turning it off. Please wait 15 min. to cool down.

#### Remarks:

- Power consumption tolerance: +/- 10%.
- Luminous flux & cd tolerance: +/-10%.

## LED Track Light High Power



### Benefits:

- Perfect solution for commercial & retail illumination
- Classic design combining two simple bodies by a joint, allowing the projection angle to be adjusted as required
- Excellent heat management
- High performance in a compact form
- Supports DALI, 0-10V, phase dimming
- Easy to install and replace
- Up to 80% energy saving, lower maintenance cost
- UV & IR free light
- Aluminum made, PC reflector & PC diffuser
- CREE LED
- SDCM<3
- UGR<19
- IP20
- 0°~350° horizontal rotating, 0°~90° projection angle adjustable
- White & black color available


### Application:

- Hallways, Offices
- Stores, Shopping Centers
- Restaurants, Bars
- Hotels, Residential


### General Characteristics:

Item	Watt (W)	Luminous Flux (lm)	CRI (Ra)	CCT (K)	Voltage (V)	Dimensions (mm)	Beam Angle
TLTHPA	40W	3500lm	90	2700K-4000K	100-240V	92*129	15°,24°,40°
TLTHPB	40W	3500lm	90	2700K-4000K	100-240V	92*126	15°,24°,40°

#### TLTHPA

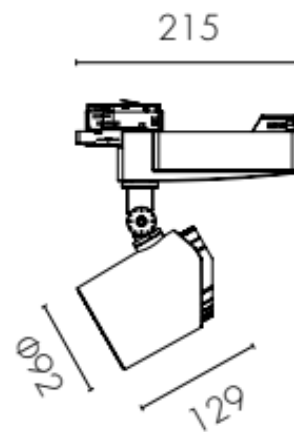

#### TLTHPB



#### Cautions:

- Please read the contents on the box and label carefully before installation.
- Check if the specification e.g. voltage, current etc meet the requirements.
- Power must be cut off before installation, replacement and cleaning.
- Don't touch the bulb/luminaire while it is on or immediately after turning it off.

#### Remarks:

- Power consumption tolerance: +/- 10%.
- Luminous flux tolerance: +/-10%



## LED Shape & Zoom Track Light



### Features:

- 30W track light with different lighting performances & spot illumination
- CCT & dimming adjustable by switch
- Different optical effects available
- Pure aluminum, excellent heat dissipation
- Beam angle adjustable from 20° to 30°
- High CRI90+
- 0° to 90° projection angle adjustable
- 0° to 355° horizontal rotation
- White or black color
- 100-240V
- PF0.9
- IP20


### Applications:

- Stores
- Museums
- Galleries
- Exhibitions
- Offices



**General Characteristics:**

PRODUCT CODE	POWER (W)	VOLTAGE	LUMEN OUTPUT	CCT (K)	BEAM ANGLE	PRODUCT DIMENSION
TL-SZTL	30W	110-240V/50-60Hz	2400lm	2700K-4000K	20°-30°	307*76mm



**Cautions:**

- Please read the contents on the box and label carefully before installation.
- Check if the specification e.g. voltage, current etc meet the requirements.
- Power must be cut off before installation, replacement and cleaning.
- Don't touch the luminaire while it is on or immediately after turning it off. Please wait 15 min. to cool down.

**Remarks:**

- Power consumption tolerance: +/- 10%.
- Luminous flux & cd tolerance: +/-10%.

\*Photos, descriptions and details of the product are subject to change without previous notice.