

## LED Inground Light



- Aluminum die-casting inground lighting
- Even & uniform light distribution
- In round & square forms
- LEDs available in 3000K / 4000K / 6000K / RGB
- 100-277V
- CRI>80
- IP67
- 15° / 30° / 60°
- Black
- Extra frosted lens available upon request
- 0.5M cable
- IK08
- PF0.9





**ERG220/CB5**

COB 5W  
D.65 H.71.5mm  
Cutout D.56mm  
Approx. 325lm



**ERG222/CB10**

COB 10W  
D.78 H.85mm  
Cutout D.62mm  
Approx. 750lm



**ERG230/CB15**

COB 15W  
D.90 H.103mm  
Cutout D.84mm  
Approx. 1100lm

**ERG230/CB30**

COB 30W  
D.100 H.140mm  
Cutout D.90mm  
Approx. 2080lm



**ERGS220/CB5**

COB 5W  
L.65 W.65 H.71.5mm  
Cutout D.56mm  
Approx. 325lm



**ERGS222/CB10**

COB 10W  
L.78 W.78 H.85mm  
Cutout D.62mm  
Approx. 750lm

**ERGS230/CB15**

COB 15W  
L.90 W.90 H.103mm  
Cutout D.84mm  
Approx. 1100lm

**ERGS230/CB30**

COB 30W  
L.100 W.100 H.140mm  
Cutout D.90mm  
Approx. 2080lm

Remarks:

- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.

## Mini LED In-ground Light 2W


### Features:

- Aluminum die-casting + PC in-ground lighting
- Using SMD LED
- Even and uniform light distribution
- Lifespan of 30,000 hours
- Energy saving, lower maintenance cost
- With 1m cable
- IP67
- IK07
- PF>0.4
- CRI>80
- In black color
- Customized color can also be made upon request



### General Characteristics:

Item Code	Power (W)	Voltage	Lumen	CCT (K)	Beam Angle	Product Dimension	Cutout	Remark
TL-MIL-2W	2W	110-240V/50-60Hz	120lm	3000K/4000K/5000K/6000K	30°	D:39.5mm H:55mm	32mm	Without honeycomb
TL-MIL-2W	2W	110-240V/50-60Hz	70lm	3000K/4000K/5000K/6000K	25°	D:39.5mm H:55mm	32mm	With honeycomb

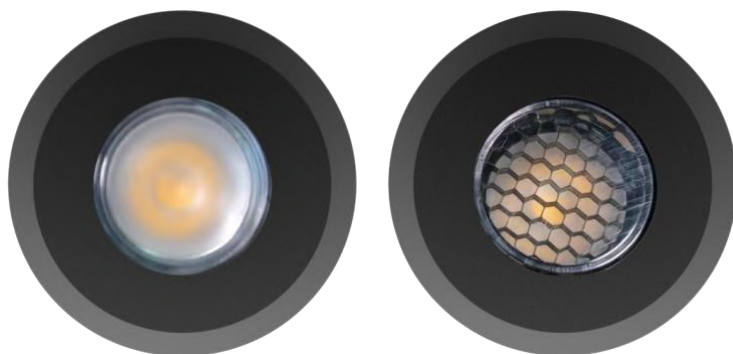

#### Remarks:

- 10% +/- tolerance: wattage, CCT, lumen output
- Photos, descriptions and details are subject to change without previous notice.