

LED Adjustable Ceiling Light



Features:

- Perfect solution for commercial spaces
- Single or duo versions available
- Adjustable for different projection angles
- Detachable structure of module providing great convenience for installation & maintenance
- Non-dimmable & dimmable version
- Round & square versions
- Energy saving, lower maintenance cost
- UV & IR free light
- CRI>90
- Aluminum made, PMMA lens
- CREE LED module
- 120/220V
- 0° - 355° horizontal rotation
- 0° - 45° angle projection adjustable
- White or black color available
- 15° - 24° - 40°


Application:

- Stores
- Shopping Centers
- Restaurants
- Bars
- Hotels
- Galleries
- Museums






General Characteristics:




Item	Watt (W)	Luminous Flux (lm)	CCT (K)	Size AxBxH (mm)	Cutout (mm)	Output Voltage	Output Current
9W-Round	9W	650lm	2700K-4000K	116x90mm	110mm	36V	210mA
18W-Round	18W	1400lm	2700K-4000K	136x109mm	130mm	36V	440mA
9W-Square	9W	650lm	2700K-4000K	117x117x88.5mm	110x110mm	36V	210mA
18W-Square	18W	1400lm	2700K-4000K	137x137x107.5mm	130x130mm	36V	440mA
9Wx2-Square	9Wx2	650lmx2	2700K-4000K	210x117x88.5mm	195x110mm	36V	210mA
18Wx2-Square	18Wx2	1400lmx2	2700K-4000K	250x137x107.5mm	235x130mm	36V	440mA

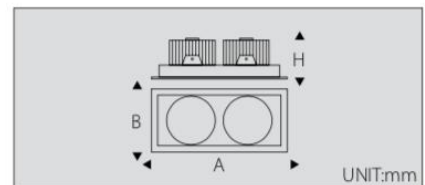




9W

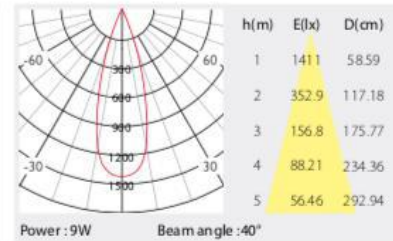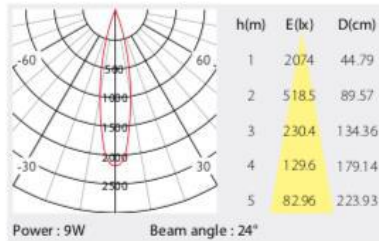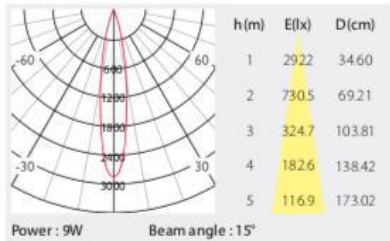




18W

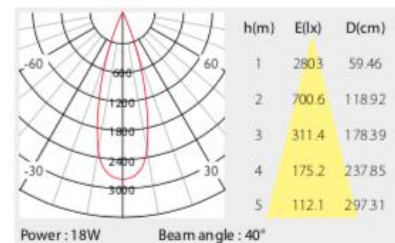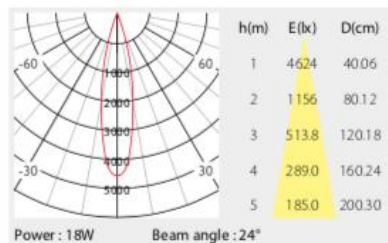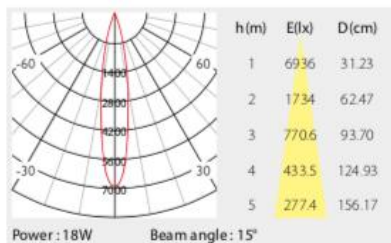

9W*2

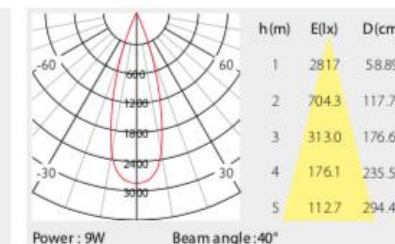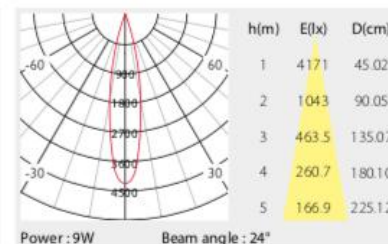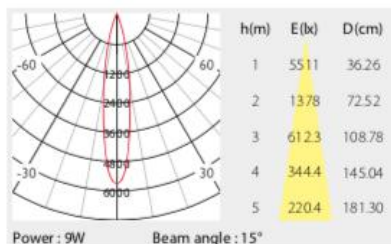

18W*2

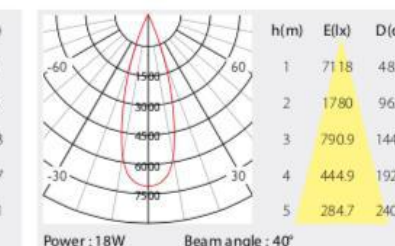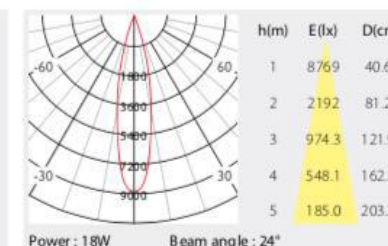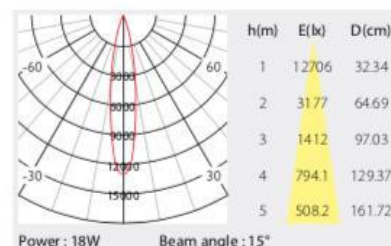

Cautions:

- Please read the contents on the box and label carefully before installation.
- Check if the specification e.g. voltage, current etc meet the requirements.
- Power must be cut off before installation, replacement and cleaning.
- Don't touch the bulb/luminaire while it is on or immediately after turning it off. Please wait 15 min. to cool down.

Remarks:

- Power consumption tolerance: +/- 10%.
- Luminous flux tolerance: +/-10%.
- Ambient temp.: -20°C + 40°C