

WL108



- LED wall light 20W
- Up & down lighting effect
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP65
- Approx. 1400lm
- PF0.9
- In white, black or grey color
- Dimensions: L260xW90xH30mm



- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.



WL109



- LED wall light 20W
- Up & down lighting effect
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP65
- Approx. 1400lm
- PF0.9
- In white, black or grey color
- Dimensions: L260xW90xH30mm



- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.






- LED wall light 8W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP54
- Approx. 400lm
- PF0.9
- In white, black or grey color
- Dimensions: D160xH40mm




- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.



WL111



- LED wall light 8W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP54
- Approx. 400lm
- PF0.9
- In white, black or grey color
- Dimensions: L160xW160xH40mm



- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.



WL112



- LED wall light 6W
- Up & down lighting effect
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP65
- Approx. 200lm
- PF0.9
- In white, black or grey color
- Dimensions: L147xW146xH45mm






- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.



WL113



- LED wall light 6W
- Up & down lighting effect
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP65
- Approx. 200lm
- PF0.9
- In white, black or grey color
- Dimensions: L160xW156xH55mm



- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.



WL114







- LED wall light in 2 sizes available
- 2x6W OR 2x10W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Red, green, yellow or blue color light also available
- Integrated LED driver
- CRI>80
- Die-cast aluminum body + PC
- 100-240V
- IP65
- Approx. 2x360lm OR 2x700lm
- PF0.9
- In white or black color
- Solid & corrosion resistant structure
- Lifespan 30000 hrs
- Dimensions:
 2x6W L115*W26*H420mm
 2x10W L115*W26*H720mm










- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.




WL115



- LED wall light 2x2.5W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Red, green, yellow or blue color light also available
- Integrated LED driver
- CRI>80
- Die-cast aluminum body + PC
- 100-240V
- IP65
- Approx. 2x10lm
- 2x4°
- In white or black color
- Solid & corrosion resistant structure
- Lifespan 30000 hrs
- Dimensions: L36xW20xH100mm






- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.




WL116



- LED wall light 2x2.5W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Red, green, yellow or blue color light also available
- Integrated LED driver
- CRI>80
- Die-cast aluminum body + PC
- 100-240V
- IP65
- Approx. 10lm + 70lm
- 4° + 70°
- In white or black color
- Solid & corrosion resistant structure
- Lifespan 30000 hrs
- Dimensions: L36xW20xH100mm






- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.




WL117



- LED wall light 2x2.5W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Red, green, yellow or blue color light also available
- Integrated LED driver
- CRI>80
- Die-cast aluminum body + PC
- 100-240V
- IP65
- Approx. 2x75lm
- 2x70°
- In white or black color
- Solid & corrosion resistant structure
- Lifespan 30000 hrs
- Dimensions: L36xW20xH100mm






- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.



WL118



- LED wall light 6W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Red, green, yellow or blue color light also available
- Integrated LED driver
- CRI>80
- Die-cast aluminum body + PC
- 100-240V
- IP65
- Approx. 40lm
- 4°
- In white or black color
- Solid & corrosion resistant structure
- Lifespan 30000 hrs
- Dimensions: L82.5xW82.5xH61mm






- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.



WL119



- LED wall light 1.5W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Red, green, yellow or blue color light also available
- Integrated LED driver
- CRI>80
- Die-cast aluminum body + PC
- 100-240V
- IP65
- Approx. 40lm
- 60°
- In white or black color
- Solid & corrosion resistant structure
- Lifespan 30000 hrs
- Dimensions: L70xW11.5xH50mm



- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.









- LED wall light in different sizes available
- 11W, 24W, 38W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP54
- Approx. 450lm, 1000lm, 1500lm
- PF0.9
- In white, black or grey color
- Dimensions:

11W L600xW90x40mm

24W L1000xW90x40mm

38W L1500xW90x40mm

- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.





- LED wall light 6W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP20
- Approx. 400lm
- PF0.9
- In white, black or grey color
- Dimensions: L100xW100xH100mm

- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.



WL122




- LED wall light 12W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP20
- Approx. 800lm
- PF0.9
- In white, black or grey color
- Dimensions: L175xW90xH30mm

- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.





- LED wall light 4W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP54
- Approx. 160lm
- PF0.5
- In white, black or grey color




- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.





- LED wall light 4W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP54
- Approx. 160lm
- PF0.5
- In white, black or grey color



- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.





- LED wall light 4W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP54
- Approx. 160lm
- PF0.5
- In white, black or grey color
- Dimensions: L180xW180xH500mm

- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.





- LED wall light 2W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP65
- Approx. 80lm
- PF0.5
- In white, black or grey color
- Dimensions: D100xH55mm





- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.



WL127



- LED wall light 2W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP54
- Approx. 80lm
- PF0.5
- In white, black or grey color
- Dimensions: L160xW95xH160mm

- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.





- LED wall light 6W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP54
- Approx. 80lm
- PF0.9
- In white, black or grey color

- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.



LED Wall Light WL129A/B





- LED wall light 2x3W OR 4x2W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP54
- Approx. 80lm
- PF0.5
- In white, black or grey color
- Dimensions: L80xW80xH50mm




- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.





- LED wall light 15W OR 30W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP20
- Approx. 1200lm, 2200lm
- PF0.9
- In white, black or grey color

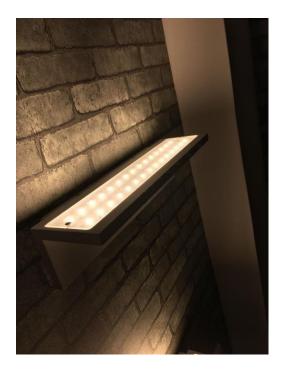

- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.



WL131



- LED wall light 2x3W
- Up & down lighting effect
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP65
- Approx. 2x150lm
- PF0.9
- In white, black or grey color
- Dimensions: L138xW98xH115mm



- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.



WL132



- LED wall light 2x3W
- Up & down lighting effect
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP65
- Approx. 2x110lm
- PFO 9
- In white, black or grey color
- Dimensions: L100xW100xH100mm



- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.