


## LED Wall Light WL108



- LED wall light 20W
- Up & down lighting effect
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP65
- Approx. 1400lm
- PF0.9
- In white, black or grey color
- Dimensions: L260xW90xH30mm

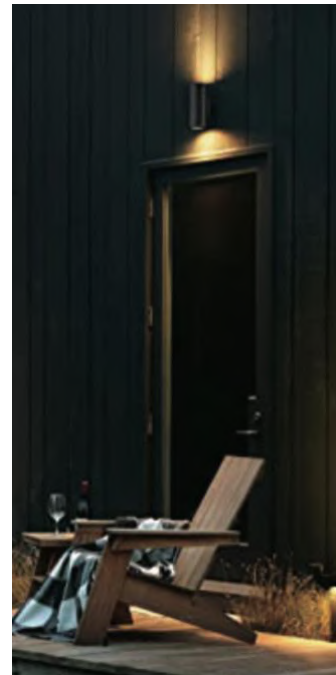

### Remarks:

- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.

## LED Wall Light WL109



- LED wall light 20W
- Up & down lighting effect
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP65
- Approx. 1400lm
- PF0.9
- In white, black or grey color
- Dimensions: L260xW90xH30mm




### Remarks:

- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.

## LED Wall Light WL110



- LED wall light 8W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP54
- Approx. 400lm
- PF0.9
- In white, black or grey color
- Dimensions: D160xH40mm

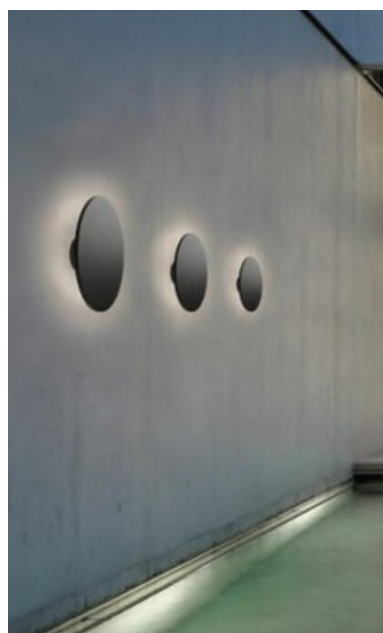


### Remarks:


- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.

## LED Wall Light

### WL111

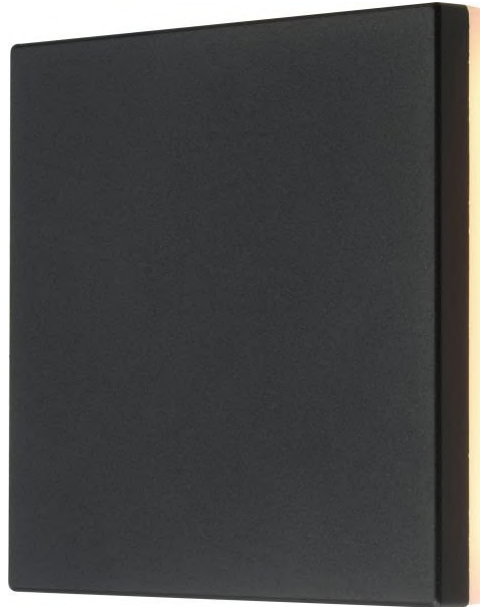

- LED wall light 8W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP54
- Approx. 400lm
- PF0.9
- In white, black or grey color
- Dimensions: L160xW160xH40mm



#### Remarks:

- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.

## LED Wall Light WL112



- LED wall light 6W
- Up & down lighting effect
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP65
- Approx. 200lm
- PF0.9
- In white, black or grey color
- Dimensions: L147xW146xH45mm




### Remarks:

- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.

## LED Wall Light WL113



- LED wall light 6W
- Up & down lighting effect
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP65
- Approx. 200lm
- PF0.9
- In white, black or grey color
- Dimensions: L160xW156xH55mm

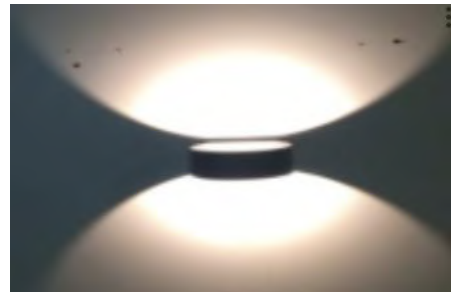



### Remarks:

- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.

## LED Wall Light WL114



- LED wall light in 2 sizes available
- 2x6W OR 2x10W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Red, green, yellow or blue color light also available
- Integrated LED driver
- CRI>80
- Die-cast aluminum body + PC
- 100-240V
- IP65
- Approx. 2x360lm OR 2x700lm
- PF0.9
- In white or black color
- Solid & corrosion resistant structure
- Lifespan 30000 hrs
- Dimensions:  
2x6W L115\*W26\*H420mm  
2x10W L115\*W26\*H720mm

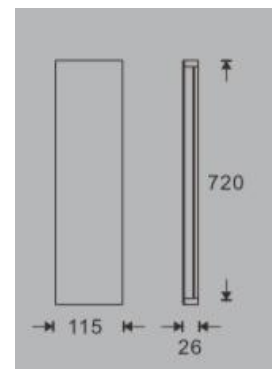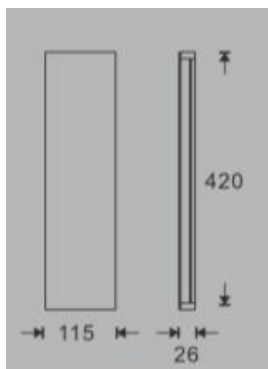

### Remarks:



- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.

## LED Wall Light

### WL115




- LED wall light 2x2.5W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Red, green, yellow or blue color light also available
- Integrated LED driver
- CRI>80
- Die-cast aluminum body + PC
- 100-240V
- IP65
- Approx. 2x10lm
- 2x4°
- In white or black color
- Solid & corrosion resistant structure
- Lifespan 30000 hrs
- Dimensions: L36xW20xH100mm

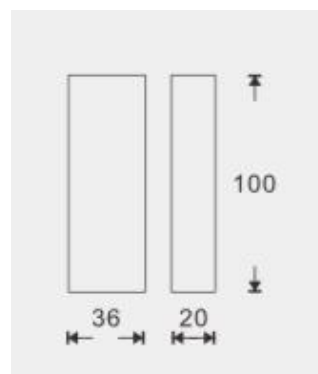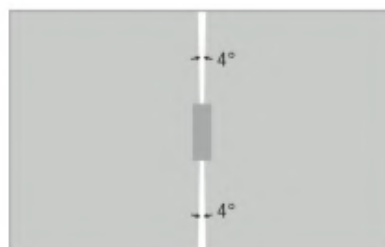



#### Remarks:

- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.

## LED Wall Light WL116

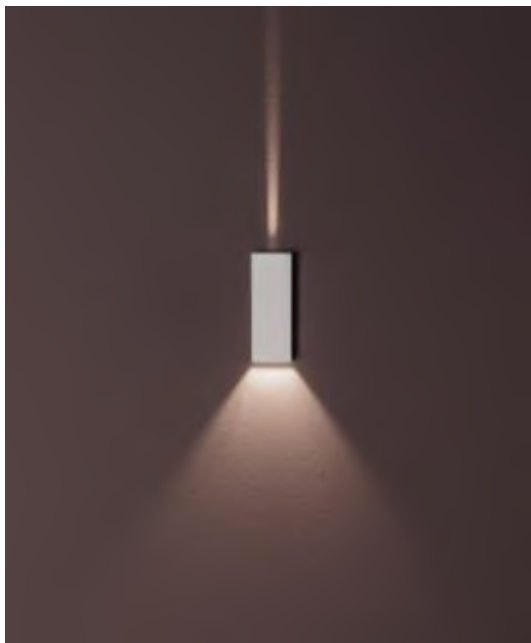


- LED wall light 2x2.5W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Red, green, yellow or blue color light also available
- Integrated LED driver
- CRI>80
- Die-cast aluminum body + PC
- 100-240V
- IP65
- Approx. 10lm + 70lm
- 4° + 70°
- In white or black color
- Solid & corrosion resistant structure
- Lifespan 30000 hrs
- Dimensions: L36xW20xH100mm

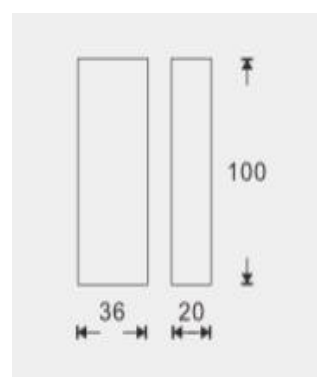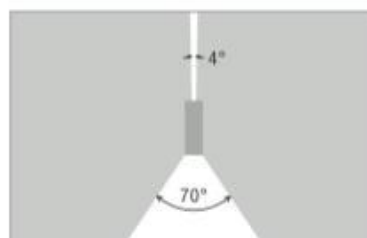



### Remarks:

- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.

## LED Wall Light WL117

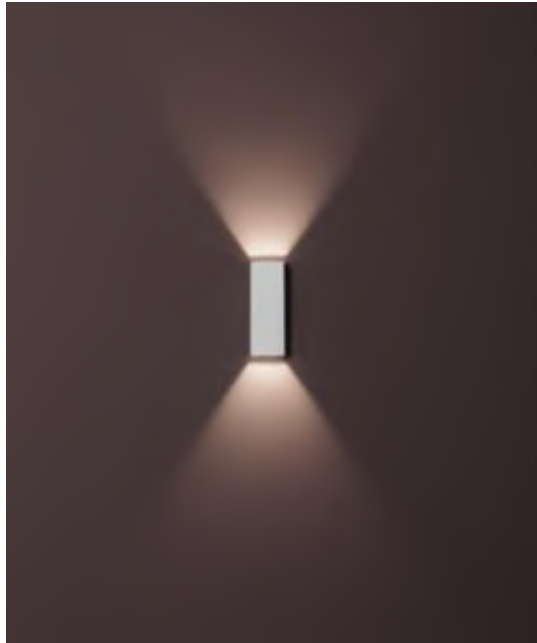


- LED wall light 2x2.5W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Red, green, yellow or blue color light also available
- Integrated LED driver
- CRI>80
- Die-cast aluminum body + PC
- 100-240V
- IP65
- Approx. 2x75lm
- 2x70°
- In white or black color
- Solid & corrosion resistant structure
- Lifespan 30000 hrs
- Dimensions: L36xW20xH100mm

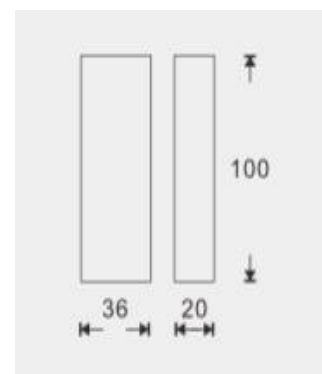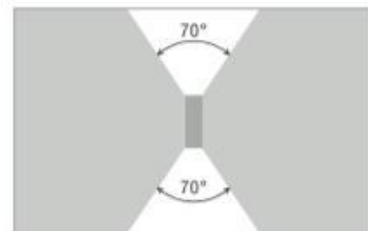


### Remarks:

- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.

## LED Wall Light WL118

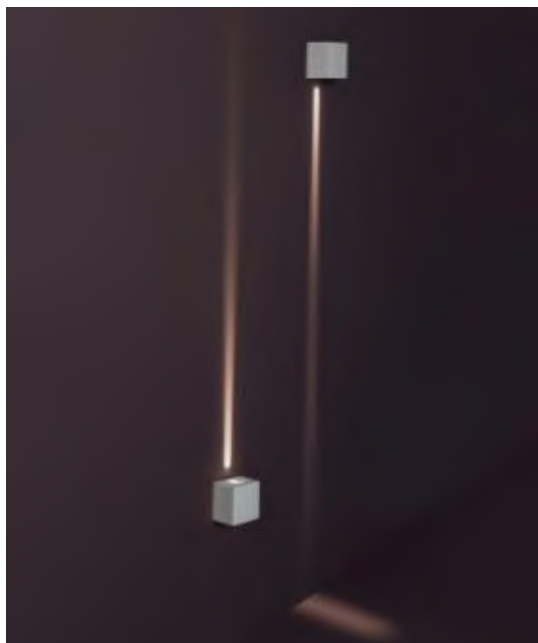


- LED wall light 6W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Red, green, yellow or blue color light also available
- Integrated LED driver
- CRI>80
- Die-cast aluminum body + PC
- 100-240V
- IP65
- Approx. 40lm
- 4°
- In white or black color
- Solid & corrosion resistant structure
- Lifespan 30000 hrs
- Dimensions: L82.5xW82.5xH61mm

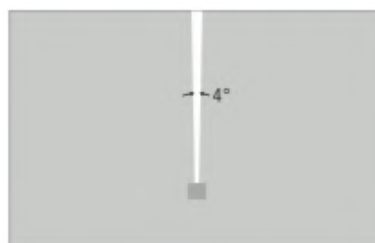


### Remarks:

- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.

## LED Wall Light WL119

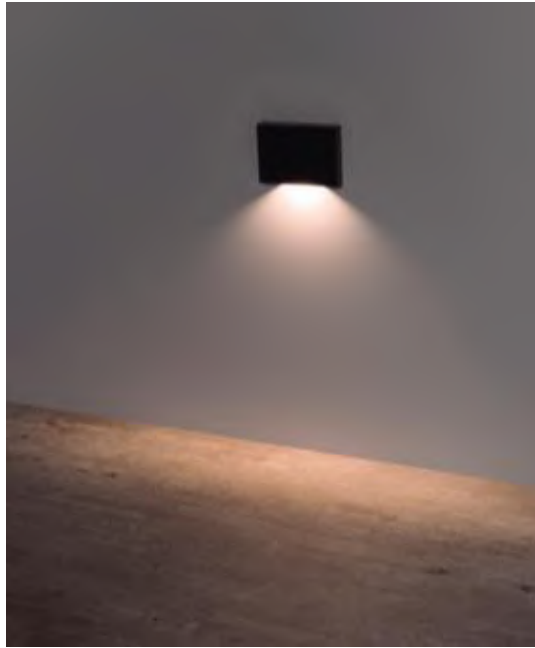

- LED wall light 1.5W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Red, green, yellow or blue color light also available
- Integrated LED driver
- CRI>80
- Die-cast aluminum body + PC
- 100-240V
- IP65
- Approx. 40lm
- 60°
- In white or black color
- Solid & corrosion resistant structure
- Lifespan 30000 hrs
- Dimensions: L70xW11.5xH50mm

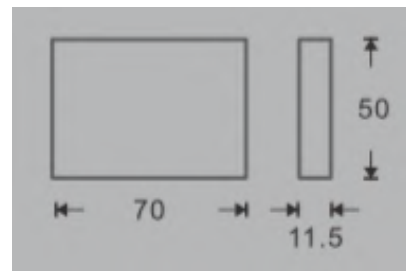

### Remarks:

- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.

## LED Wall Light

### WL120



- LED wall light in different sizes available
- 11W, 24W, 38W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP54
- Approx. 450lm, 1000lm, 1500lm
- PF0.9
- In white, black or grey color
- Dimensions:
  - 11W L600xW90x40mm
  - 24W L1000xW90x40mm
  - 38W L1500xW90x40mm

Remarks:

- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.

## LED Wall Light

### WL121



- LED wall light 6W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP20
- Approx. 400lm
- PF0.9
- In white, black or grey color
- Dimensions: L100xW100xH100mm

Remarks:

- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.

## LED Wall Light

### WL122



- LED wall light 12W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP20
- Approx. 800lm
- PF0.9
- In white, black or grey color
- Dimensions: L175xW90xH30mm

Remarks:


- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.

## LED Wall Light

### WL123



- LED wall light 4W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP54
- Approx. 160lm
- PF0.5
- In white, black or grey color

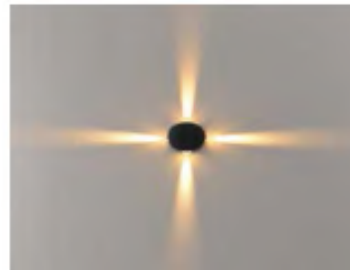

#### Remarks:


- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.

## LED Wall Light

### WL124



- LED wall light 4W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP54
- Approx. 160lm
- PF0.5
- In white, black or grey color



Remarks:

- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.

## LED Wall Light

### WL125



- LED wall light 4W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP54
- Approx. 160lm
- PF0.5
- In white, black or grey color
- Dimensions: L180xW180xH500mm

Remarks:

- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.

## LED Wall Light WL126



- LED wall light 2W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP65
- Approx. 80lm
- PF0.5
- In white, black or grey color
- Dimensions: D100xH55mm



Remarks:

- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.

## LED Wall Light

WL127



- LED wall light 2W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP54
- Approx. 80lm
- PF0.5
- In white, black or grey color
- Dimensions: L160xW95xH160mm

Remarks:

- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.

## LED Wall Light WL128



- LED wall light 6W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP54
- Approx. 80lm
- PF0.9
- In white, black or grey color

Remarks:

- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.

## LED Wall Light

WL129A/B



- LED wall light 2x3W OR 4x2W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP54
- Approx. 80lm
- PF0.5
- In white, black or grey color
- Dimensions: L80xW80xH50mm




Remarks:

- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.

## LED Wall Light WL130



- LED wall light 15W OR 30W
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP20
- Approx. 1200lm, 2200lm
- PF0.9
- In white, black or grey color

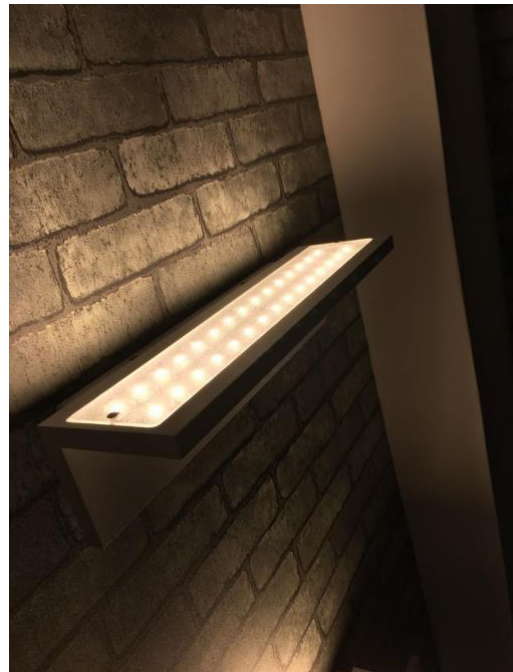


Remarks:

- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.

## LED Wall Light WL131



- LED wall light 2x3W
- Up & down lighting effect
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP65
- Approx. 2x150lm
- PF0.9
- In white, black or grey color
- Dimensions: L138xW98xH115mm

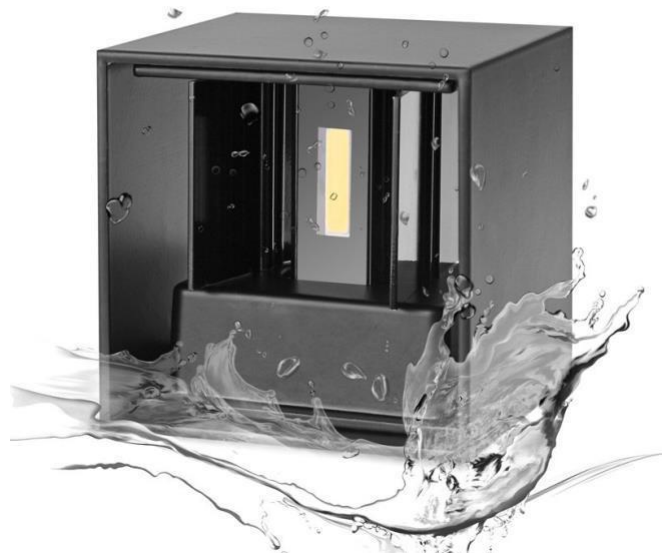

Remarks:

- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.

## LED Wall Light WL132



- LED wall light 2x3W
- Up & down lighting effect
- LEDs available in 2700K / 3000K / 4000K / 5000K
- Integrated LED driver
- CRI>80
- Die-cast aluminum body
- 100-240V
- IP65
- Approx. 2x110lm
- PF0.9
- In white, black or grey color
- Dimensions: L100xW100xH100mm



Remarks:

- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.

## LED Wall Lights Professional Series

- LED wall lights from our professional series for outdoor illumination
- Modern & minimalist design to fit perfectly into a variety of outdoor architectural environments
- LEDs available in 3000K / 4000K / 6000K
- CRI>80
- Made of high-quality material & components
- Grey, black, white
- Offering uniform, soft & even light
- IP65

### P

5W 550lm

On-Off

45°



### M

12W 1300lm, 24W 2600lm

On-Off, DALI

130°

CCT adjustable



**C**

Up or down / Up & Down  
 6W 500lm, 12W 1000lm  
 On-Off, DALI  
 Asymmetric optics



**T**

Up or down / Up & Down  
 24W 200lm, 42W 3000lm  
 On-Off, DALI  
 18°, 24°, 36°



**TS**

Up or down / Up & Down  
 24W 200lm, 42W 3000lm  
 On-Off, DALI  
 18°, 24°, 36°



**N**

10W 900lm

On-Off

360°



Remarks:

- 10% +/- tolerance: wattage, CCT, lumen output.
- Photos, description & details are subject to change without previous notice.