

## LED Modules



### Features:

- Modules to replace traditional MR16 & GU10 bulbs
- 8W, 10W & 15W
- Keeping a small size, achieving higher wattage & brightness
- Easy interchangeable lens from 18°, 24°, 38°, 60°
- External driver
- 8W: UGR17-19 10W: UGR19-21 15W: UGR18-23
- CRI>90 + dimmable versions optional (Triac Phase, 1-10V)
- **RGB + White (adjustable CCT 2200K-5700K)** also available upon request, adjusting can be made by using an app or remote control
- 50.000 hours lifespan
- Excellent heat dissipation
- Suitable for enclosed fixtures
- PF0.9
- Operating temperature: -10°C to 60°C
- IP20
- Pure aluminum
- Empty compatible fixtures also available




### Applications:

- Stores
- Residents
- Hotels
- Offices
- Banks

**General Characteristics:**

PRODUCT CODE	POWER (W)	VOLTAGE	Lumen Output	CCT (K)	CRI	PRODUCT DIMENSION
TLM-8	8W	110-240V/50-60Hz	700-800lm	3000K-5000K	80+	D49.8 H43mm
TLM-10	10W	110-240V/50-60Hz	880-1000lm	3000K-5000K	80+	D49.8 H53mm
TLM-15	15W	110-240V/50-60Hz	1300-1500lm	3000K-5000K	80+	D49.8 H73mm

**Dimensions:**

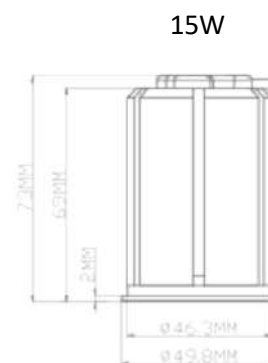


■ Interchangeable lens: 18° / 24° / 38° / 60°



■ Suitable for many different luminaires



■ Compatible Technolamp empty fixtures

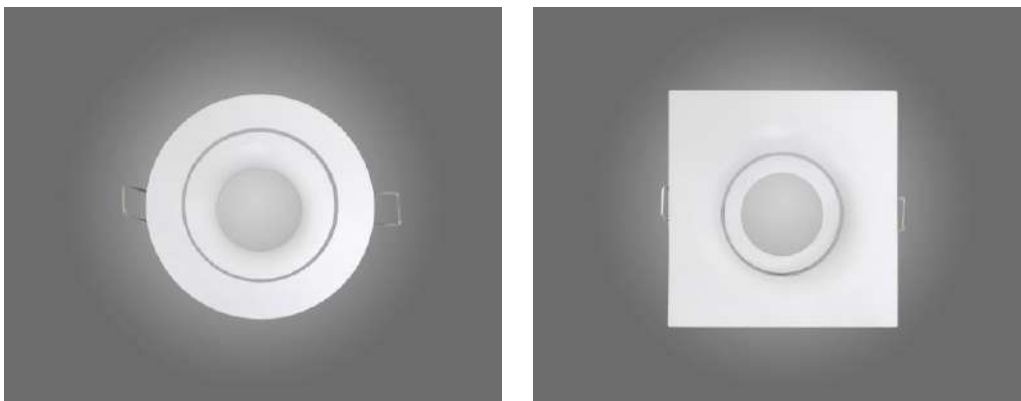

Cautions:

- Please read the contents on the box and label carefully before installation.
- Check if the specification e.g. voltage, current etc meet the requirements.
- Power must be cut off before installation, replacement and cleaning.
- Don't touch the luminaire while it is on or immediately after turning it off. Please wait 15 min. to cool down.

Remarks:

- Power consumption tolerance: +/- 10%.
- Luminous flux & cd tolerance: +/- 10%.

\*Photos, descriptions and details of the product are subject to change without previous notice.