

LED Downlight H Series



Features:

- Recessed spot downlights in round & square form
- Two light beam directions, symmetrical & asymmetrical
- Minimalistic design
- Easy fitting
- Offering even & soft light
- Secondary reflector, filter & honeycomb available
- Energy saving, lower maintenance cost
- UV & IR free light
- CRI>90
- Aluminum made, PMMA lens
- Luminus & CREE LED
- 100-240V
- 10°, 15°, 24°, 36°
- White or black trim

Application:

- Stores
- Shopping Centers
- Restaurants
- Bars
- Hotels
- Galleries
- Museums



General Characteristics:

Item	Watt (W)	Luminous Flux (lm)	CCT (K)	Size (mm)	Cutout (mm)	Output Voltage	Output Current
5W-Round	5W	250lm	2700K-4000K	49x73.5mm	40mm	3V	1000mA
5W-Round	5W	300lm	2700K-4000K	64x72mm	55mm	36V	110mA
7W-Round	7W	450lm	2700K-4000K	74x80mm	65mm	36V	160mA
9W-Round	9W	680lm	2700K-4000K	84x86mm	75mm	36V	210mA
15W-Round	15W	1050lm	2700K-4000K	94x97mm	85mm	36V	360mA
5W-Square	5W	250lm	2700K-4000K	49x73.5mm	40x40mm	3V	1000mA
5W-Square	5W	300lm	2700K-4000K	64x72mm	55x55mm	36V	110mA
7W-Square	7W	450lm	2700K-4000K	74x80mm	65x65mm	36V	160mA
9W-Square	9W	680lm	2700K-4000K	84x86mm	75x75mm	36V	210mA
15W-Square	15W	1050lm	2700K-4000K	94x97mm	85x85mm	36V	360mA
5W-Round-A	5W	280lm	2700K-4000K	74x75mm	65mm	36V	110mA
7W-Round-A	7W	500lm	2700K-4000K	84x82mm	75mm	36V	160mA
9W-Round-A	9W	700lm	2700K-4000K	94x91mm	85mm	36V	210mA
5W-Square-A	5W	280lm	2700K-4000K	74x75mm	65x65mm	36V	110mA
7W-Square-A	7W	500lm	2700K-4000K	84x84.5mm	75x75mm	36V	160mA
9W-Square-A	9W	700lm	2700K-4000K	94x92mm	85x85mm	36V	210mA

Secondary Reflector:



Shiny Silver Shiny Gold Shiny Black

Accessories:



Elliptical lens Honey-comb

Color Filter:



Red Blue Yellow Green

Secondary Reflector:



Black White

Accessories:



Elliptical lens Honey-comb




Color Filter:






Red Blue Yellow Green

SYMMETRICAL




5W-Mini

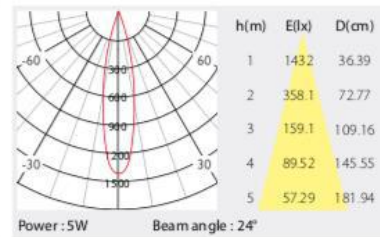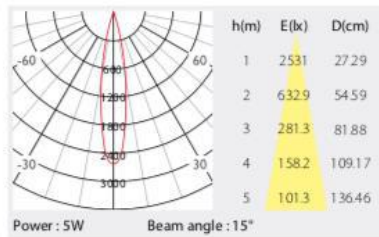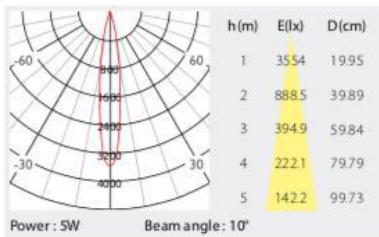




5W

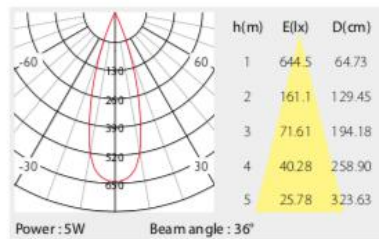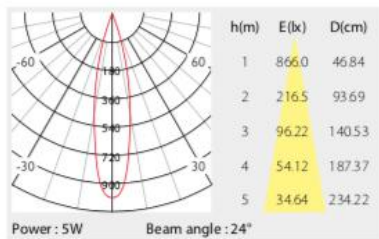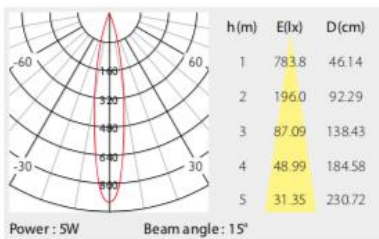




7W

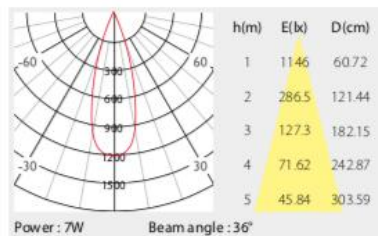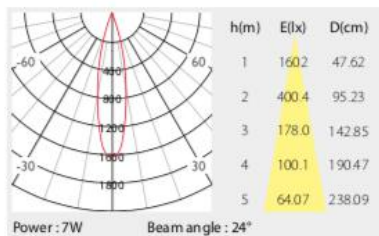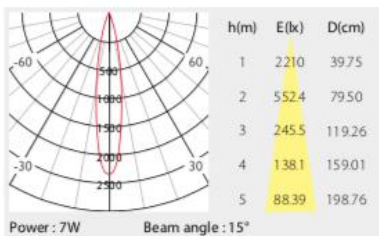

9W

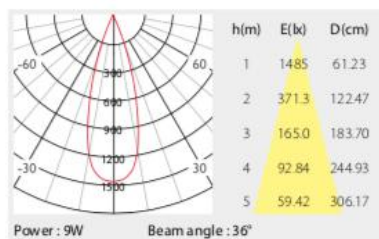
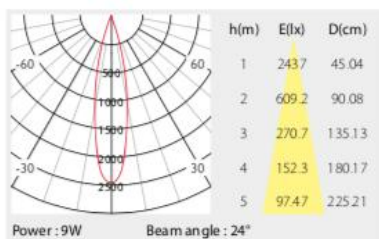
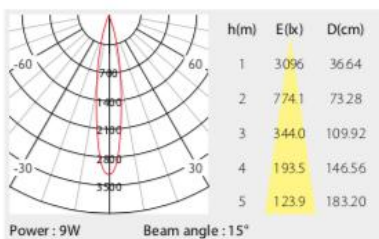


15W

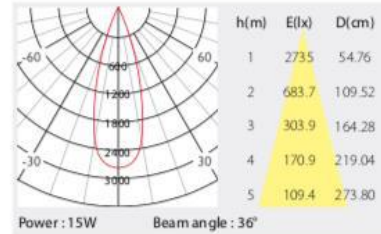
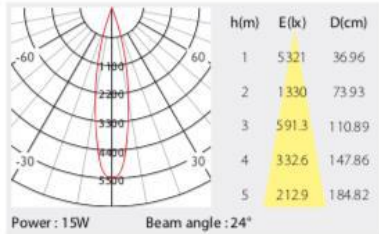
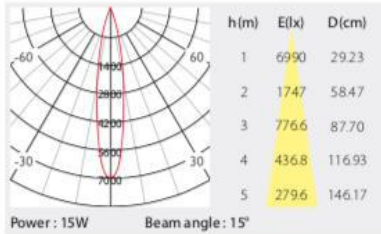


ASYMMETRICAL




5W

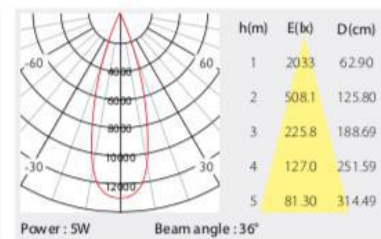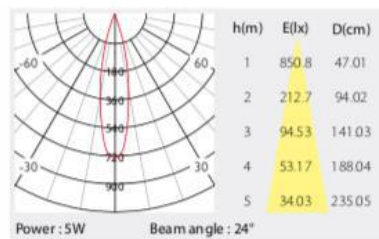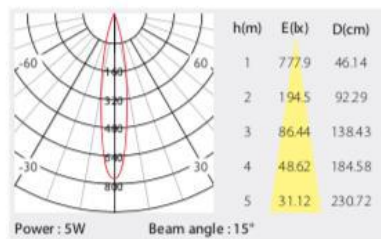

7W

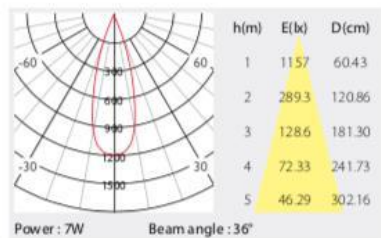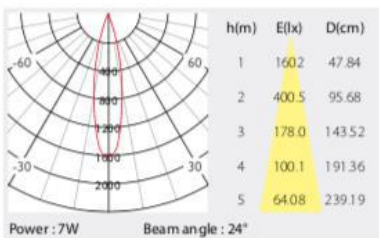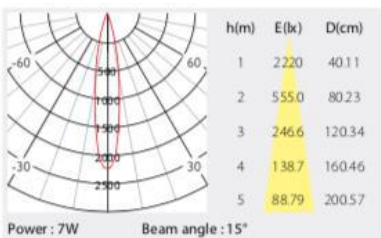

9W

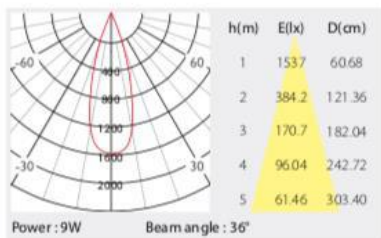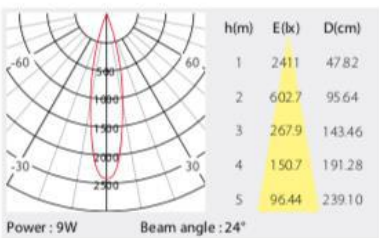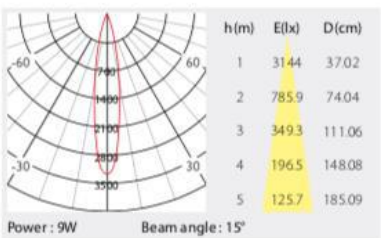



Cautions:

- Please read the contents on the box and label carefully before installation.
- Check if the specification e.g. voltage, current etc meet the requirements.
- Power must be cut off before installation, replacement and cleaning.
- Don't touch the bulb/luminaire while it is on or immediately after turning it off. Please wait 15 min. to cool down.

Remarks:

- Power consumption tolerance: +/- 10%.
- Luminous flux tolerance: +/-10%.
- Ambient temp.: -20°C + 40°C